

Operating Instructions

Thank you very much for choosing SLIK Carbon Series Tripod. The SLIK Corporation has designed your tripod to be a sturdy, rugged, dependable product that will provide you with many years of satisfactory use. Please take a few moments to read this operating instruction carefully before use so that you can take full advantage of your Tripod's many fine features. Retain this operating instruction in case you might want to refer back to it.

⚠ Caution

This caution icon refers to information pertaining to important safety procedures in preventing injuries, or damages which may occur as a result of mishandling this product.

🚫 Prohibition

This prohibited icon refers to information pertaining to prohibited contents. Please refer to instructions closely to avoid accidents.

Specification

PRO 823CF
Max. operating height 1,685 mm
Folded length 600 mm
Weight 1.62 kg


PRO 824CF
Max. operating height 1,627 mm
Folded length 478 mm
Weight 1.59 kg

PRO 723CF
Max. operating height 1,662 mm
Folded length 571 mm
Weight 1.4 kg

PRO 724CF
Max. operating height 1,636 mm
Folded length 473 mm
Weight 1.4 kg

L666

Components

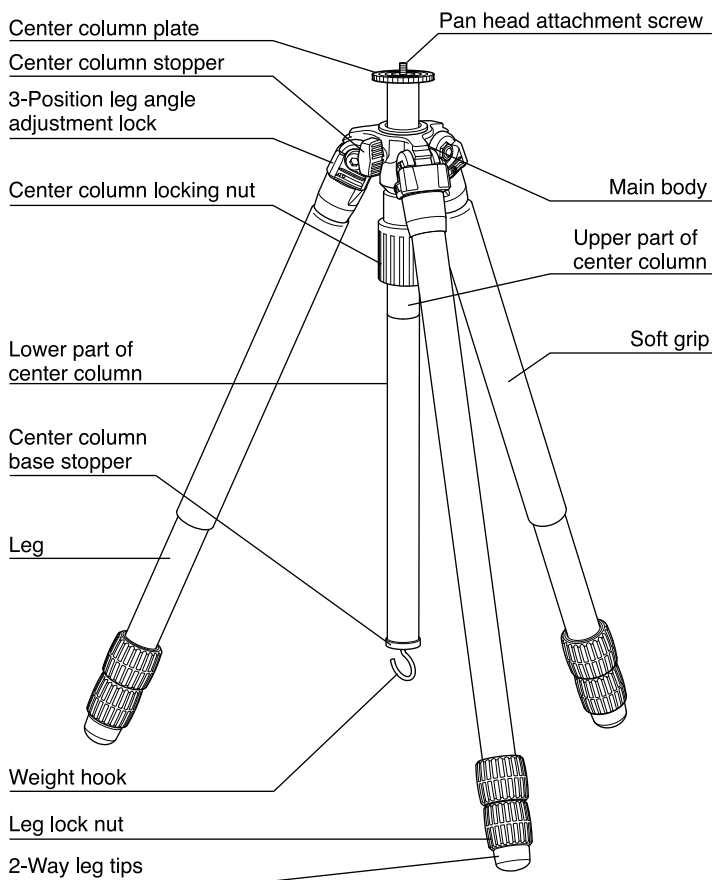


PRO 823CF

⚠ Caution

Soft Grip is consumption and cannot be used permanently. Please replace it whenever ragged.

Carrying the tripod

🚫 Prohibition




Carrying a tripod with a camera left on can result in unexpected accidents. We, therefore, recommend you to remove your camera while carrying the tripod.

In case of the shock given to tripod by force

⚠ Caution


When the shock has been given to the tripods and legs such as falling down, please check well whether there are cracks, flaws, etc. on the pipes or not.

When you find some cracks, flaws, etc. on the pipes, stop to use it and ask to repair. It may be wounded when some of fibers came out from the pipes. In that case do not touch it.

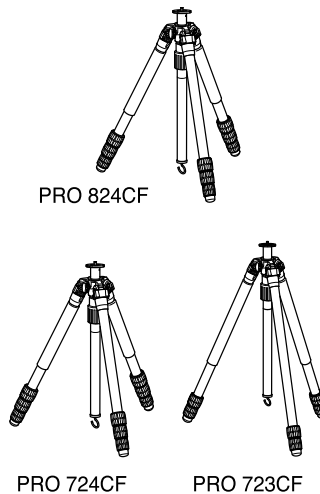

Optional Accessory

SPIKE SET
Cat. NO. 618-410



Equipment that can be loaded on this tripod

Maximum loading capacity:

PRO 823CF : 7kg

PRO 824CF : 7kg


PRO 723CF : 5kg

PRO 724CF : 5kg

Do not exceed the specified loading capacity.

Pan head mounting post


🚫 Prohibition



Do not attach a camera directly to the Pan head attachment screw. This may damage both your camera and tripod.

Clamp head


🚫 Prohibition



Do not use an optional Clamp head for a carbon fiber tripod. The pipe may be damaged.

Setting up

⚠ Caution



To prevent accidental equipment fall or tripod tipping over, making sure all levers, knobs and handles on the tripod are securely tightened. And all of the three legs are opened all the way.

